

Cash Drawer

SUNMI Mini Cash Drawer

The high-toughness ABS matt panel is adopted which is rustless and won't hurt your hands.


Same capacity, reduced volume (by 22.5%) compared with traditional small cash drawers.

It can be opened with one press on the key for solid and smooth industrial bearings are used.

With wide-area voltage driven design it suits to 9V/12V/24V cash register output voltage.

Give you a neat work table with a cable storage compartment on the top.

Strengthened steel metallic clips covered by durable ABS is adopted for noise reduction.

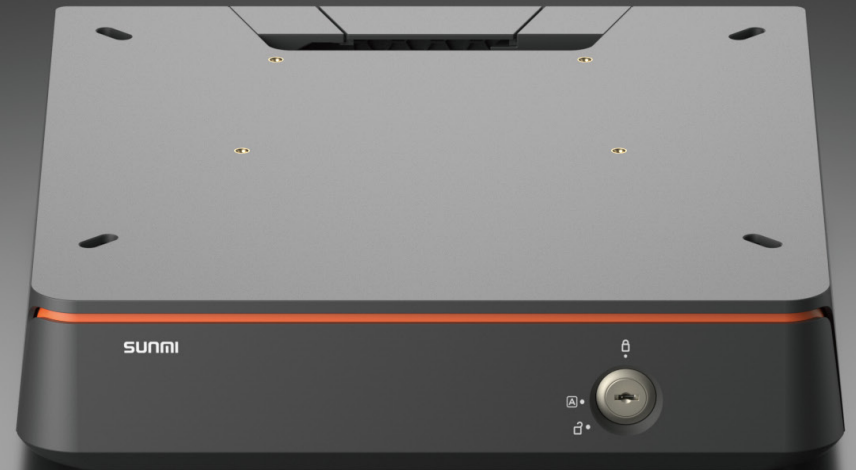

10Kg
bearable



1,000,000+
operations



Open
interfaces



Customizable
safety reminder



Three positions
lock design

SUNMI Mini Cash Drawer

Technical specifications



Cash Drawer
Plastic and metallic



Trays
Four normal bill & one
big bill trays
Three coin trays



Metallic Bearing
Up to 10kg bearable



Cable
RJ12, 6P4C, 0.8m



Lock
Three positions lock
(electronic, manual and
deadlock)



Bill Clip
Plastic and metallic



**Cable Storage
Compartment**
Rear-set
compartment with cover



Drive Voltage
DC9V~24V, 1A



Drive Pulse Width
100ms – 300ms



Drive Protections
3A overcurrent protection
triggered by electromagnetic
valve shrot circuit
Input pulse overvoltage
protection
Input pulse timeout protection
Self-adaptive to 9V~28V input
voltage
Contact ESD 8KV/air ESD 15KV
Termal shutdown



Service Life
≥1000000 operations



Noise
<50dB



Status Feedback
Status detection
switch



Size
W317mm x L332mm x H72mm



Weight
2.3 Kg



Working Environment
Working temperature and humidity:
0°C ~ 45°C, 30% ~ 85%
Storage temperature and humidity:
-20°C ~ 60°C, 10% ~ 90%